

LU-TP 98-21
hep-ph/9810208
October 1998

Development Strategies for PYTHIA version 7

Leif Lönnblad
Department of Theoretical Physics
Sölvegatan 14a
S-223 62 Lund, Sweden
leif@thep.lu.se

Abstract

This document describes the strategies for the development of the PYTHIA7 program. Both the internal and external structure of the program is discussed. Some comments on relationship to other software is given as well as some comments on coding conventions and other technical details.

Contents

1	Introduction	3
2	The structure of Event Generation	4
2.1	The structure of a generated event	4
2.2	The structure of the event generating process	10
2.3	Initialization	14
2.4	Running	15
2.5	Analysis	17
2.6	Finishing	17
3	Introducing new models in PYTHIA7	17
3.1	n -fermion generators	17
3.2	Parton density functions	18
3.3	Other models	18
4	User Interface	18
4.1	Parameters and Switches	19
4.2	A user session	20
5	Error handling	21
6	Documentation	21
7	Relationship to CLHEP/LHC++	23
7.1	The Event record	23
7.2	Particle properties	24
7.3	Event generator utilities	24
7.4	Analysis	24
7.5	General utilities	25
7.6	Persistency	25
7.7	User interface	25

8 Outlook	26
A Coding conventions	26
A.1 Name spaces and filenames	26
A.2 Garbage collection	27
B Licensing	27
C Booch notation	27

1 Introduction

PYTHIA7 [1] will be a new event generator well suited to meet the needs of future high-energy physics projects, for phenomenological and experimental studies. The main target is the LHC community, but it will work equally well for linear e^+e^- colliders, muon colliders, the upgraded Tevatron, and so on. The generator will be based on the existing Lund program family, but rewritten from scratch in a modern, object-oriented style, using C++. The greatly enhanced structure will make for improved ease of use, extendibility to new physics aspects, and compatibility with other software likely to be used in the future.

The current state-of-the-art event generator programs — PYTHIA, JETSET and ARIADNE for the purposes of this application — generally work well. It has been possible gradually to extend them well beyond what could originally have been foreseen, and thus to parallel the development of the high-energy physics field as a whole towards ever more complex analyses. However, a limit is now being approached, where a radical revision is necessary, both of the underlying structure and of the user interface.

Even more importantly, there is a change of programming paradigm, towards object-oriented methodology. In the past, particle physicists have used Fortran, but now C++ is taking over. C++ has been adopted by CERN as the main language for the LHC era. The CERN program library is partly going to be replaced by commercial products, partly be rewritten in C++. In particular, the rewriting of the detector simulation program Geant [2] is a major ongoing project, involving several full-time programmers for many years, plus voluntary efforts from a larger community. The CERN shift is matched by corresponding decisions elsewhere in the world: at SLAC for the B-factory, at Fermilab for the Tevatron Run 2, and so on. C++ is also the language adopted by industry (plus Java, for Internet applications).

Therefore a completely new version of the Lund programs, written in C++, is urgently called for. In order to reap the benefits of the C++ language, it is not enough with a mechanical conversion (like what f2c offers from Fortran to C). What is required is a complete rethinking of the way an event generator should look.

This paper will lay out the development strategies for the PYTHIA7 event generator. It will focus on the basic structure for the event representation and the event generation, but will also discuss other aspects of the development, such as the relation between parts of the PYTHIA7 code and other High Energy Physics (HEP) software, the user interface and documentation. In addition, in the appendix some coding conventions will be discussed together with the licensing policy.

This paper is not the final word on the structure of PYTHIA7, but is meant to initiate a discussion between people interested in the future development of PYTHIA7

and event generation in general. Comment and suggestions are more than welcome.

2 The structure of Event Generation

To discuss the structure of event generation it is, of course, reasonable to first look at the structure of an *event*. Experimentally, an event is some combinations of hits in a detector, triggering the recording of all hits present in a given time interval. A computer generated event is different. Since detector simulation is not normally included, it does not contain hits, but rather a set of particles which could give hits in the detector, thus possibly triggering a recording. But it may also contain other information, which could be important for the analysis of the generated event.

It is instructive to see what is provided by conventional event generators via eg. the LUJETS [3] or HEPEVT [4] common blocks. These are essentially numbered lists of particle entries, but they also contains a lot of information about how the event was generated. For example, the entry of a particle which has decayed includes numbers representing the range of entries containing its decay products, and vice versa, each of the decay product entries has a number representing the entry of its parent. The common blocks may also include entries describing one or several hard sub-processes, and may also contain particles from several different collisions which could all be registered as one event.

It is clear that object orientation enables us to have the actual structure of the *event object* to reflect the history of the event generation in a much more natural way. This structure may become very complex, but it is important to keep in mind that, while doing complex analysis of a generated event requires a complex structure, it must still be very simple to do a simple analysis. This is accomplished in C++ using the *data hiding* aspect of object orientation, where the user need not know about the way data is actually structured inside an object, but only about the methods for extracting the desired information.

2.1 The structure of a generated event

For PYTHIA7 the suggested internal structure of a generated event is given in fig. 1 as a simplified class diagram in Booch notation[5].

To exemplify the structure we use the case of Z^0 production at the LHC. The luminosity at the LHC is so high that each **Event** will consist of several **Collisions** between the protons in each bunch crossing. One **Collision** is special since it will contain the physics process (Z^0 production) under study and will be called the *trigger* collision. The rest will be of minimum-bias type and are called *overlayed* collisions.

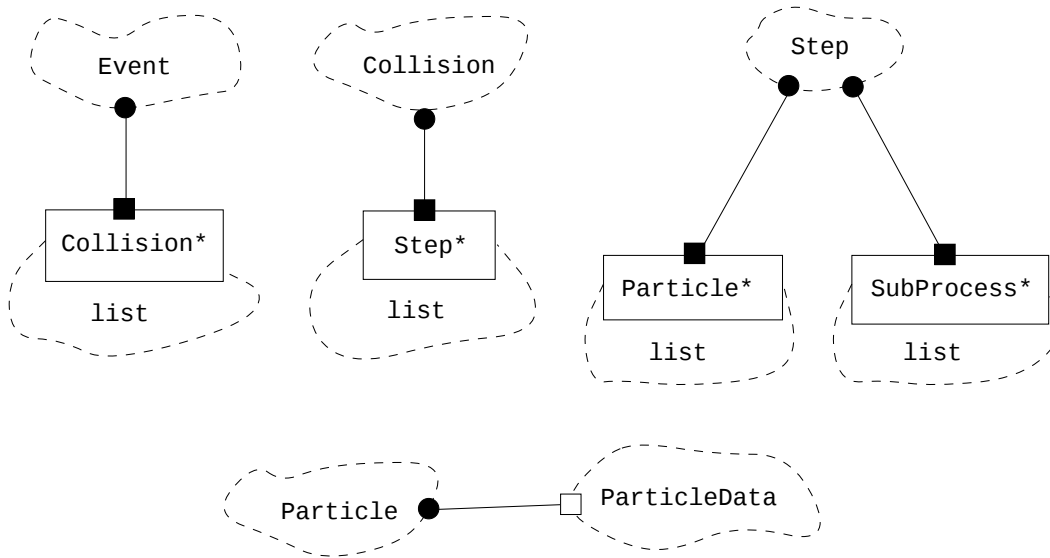


Figure 1: *Class diagram for the suggested structure of a generated event in PYTHIA7. (See appendix C for a quick guide on Booch notation.)*

Each **Collision** consists of a number of **Steps**. Each step contains a list¹ of outgoing particles from the collision describing the state of the event after a given step in the event generating process. As we shall see below, the actual steps needed to generate events are process- and model-dependent. In this example, the first step in the trigger collision would be the generation of the hard sub-collision eg. $q\bar{q} \rightarrow Z^0$. The second could be the parton cascade. After that there may be secondary sub-collisions between the partons in the colliding protons generated, followed by the hadronization and the decay of unstable particles. If the Z^0 then decays into quarks there may be an additional parton cascade step followed by hadronization and decay.

Here follows a more detailed description of the classes used to describe an event.

ParticleData

A *Particle* is, of course, one of the most central concepts in HEP. It is, however, not easy to translate the general notion of a particle to a (C++) object in a way acceptable to everyone (see section 7.1 for an elaboration on this problem).

In PYTHIA7, a **Particle** object representing an instance of a given particle type will be clearly separated from the **ParticleData** object representing the properties

¹Note that throughout this document, *list* represents a *container* in general. In each case the `std` container most suited for the task at hand will be used.

of the particle type. A `Particle` will contain a pointer to the `ParticleData` object containing information common to all instances of the particle type, together with information specific to the actual particle instance.

A `ParticleData` object will contain the following information:

- The particle id number as given by PDG [6].
- A character string representing the particle name²
- The nominal mass.
- A pointer to a `ParticleMass` object.
- The width and/or the average lifetime.
- The charge.
- The spin.
- The colour.
- A flag to tell if the particle is stable or not.
- A pointer to the corresponding anti-particle.
- A flag to tell if the corresponding anti-particle should be modified in parallel with the particle.
- A decay table.

The `ParticleData` class will also define an enumeration, relating each of the standard particle codes to sensibly named identifiers, eg. `ParticleData::piplus=211`.

The pointer to the `ParticleMass` object is typically `null` for most particles. But for some particles it is not possible to define a unique nominal mass. For eg. quarks one could define a *constituent* mass, a *current algebra* mass, and a running mass according to some renormalization scheme. Such information is stored in the `ParticleMass` object.

The properties of an anti-particle can, of course, be deduced from those of the particle. To simplify the access, however, the properties of the particle and its anti-particle are stored as two separate objects. Instead the properties of the anti-particle will by default be automatically updated whenever the particle is changed, and vice versa. Optionally, a flag can be set to completely decouple the two.

The decay table is a list of decay modes specifications, each associated with a decay fraction (Γ_i/Γ) and a `Decayer` object, which is able to perform the actual decay. The decay mode specification may be a simple list of the decay products, but may also be much more complicated. It is up to the `Decayer` object to say whether it is able to perform the specified decay or not.

²Possibly in different formats, eg. L^AT_EX, HTML etc. This will hopefully also be standardized by PDG.

Besides the list of decay products, the specification may contain a list of **ParticleMatcher** objects, where each object corresponds to one decay product from a set of particles represented by this matcher³. It may also contain a **ParticleMatcher** object corresponding to any number of decay products of the matching set. In this way one can represent decay modes such as

$$B^+ \rightarrow \text{any D meson} + \pi^+ + \pi^- + \text{any number of other mesons}$$

The decay mode may also contain a list of decay modes for specifying subsequent resonant decays and a list of **ParticleData** objects corresponding to excluded intermediate resonances. Hence the following three decay modes with the same final state decay products, can be made distinct:

$$\begin{aligned} D^+ &\rightarrow K^- \pi^+ e^+ \nu_e \text{ (inclusive),} \\ D^+ &\rightarrow \bar{K}^{0*} e^+ \nu_e \text{ (with subsequent } \bar{K}^{0*} \rightarrow K^- \pi^+), \\ D^+ &\rightarrow K^- \pi^+ e^+ \nu_e \text{ (non-resonant).} \end{aligned}$$

For some particles, the decay fractions are given by models which depends on many parameters. The decay table may therefore include a pointer to a **DecayRater** object which may calculate the decay fractions for each specified channel at initialization time, or even for each instance of the particle type. The latter is eg. needed for wide resonances, where the decay fractions are dependent on the actual mass of a particle instance. Also for processes such as $e^+e^- \rightarrow Z^0$ at a future linear collider, where Z^0 is far off-shell above the $t\bar{t}$ threshold, it is clear that one cannot use the same decay fractions as for an on-shell Z^0 at LEP 1.

Each decay channel has a switch to temporarily disallow a decay, and it is possible to switch on or off groups of decay channels for a given particle with a search criteria, eg. *switch off all leptonic decay modes for W^+* . Each decay channel can be associated with a *K-factor* to temporarily boost the rate of a channel which is under study.

For some analysis situations, it is desirable to have different decay modes for the same particle type if it appears more than once in an event. For example, one may want to study $H^0 \rightarrow Z^0 Z^0$, where one Z^0 decays leptonically and the other hadronically. This may then be specified in the decay table of the higgs with the subsequent resonance decay mechanism described above. The same can be done for $H^0 \rightarrow W^+ W^- \rightarrow e\nu + \text{jets}$, but here one could alternatively decouple the W^+ from the W^- , and then switch off all leptonic channels for one and all hadronic for the other.

The specification of subsequent resonance decays can also be used for correlated decays. Specifying $H^0 \rightarrow Z^0 Z^0 \rightarrow q\bar{q}q'\bar{q}'$, the decayer performing the Higgs decay

³This is the same scheme which is used in the HepPDT classes[7]

can be made responsible for generating the desired angular correlations in the Z^0 decays. Alternatively, the decayer responsible for the Z^0 decay may decide to model the correlations by peeking at the decay of the sibling Z^0 .

The set of particles used by PYTHIA7 is not fixed. The user can freely introduce new ones, and also write new classes inheriting from the `ParticleData` and `Particle` classes.

Particle

The `Particle` object contains the following information:

- A pointer to the corresponding `ParticleData` object.
- A list of pointers to `Particles`, corresponding to decay products. This list is empty if the particle has not decayed.
- A list of pointers to `Particles`, corresponding to parent particles. This list is empty if the particle has no ancestors.
- A pointer to a `Particle` object corresponding to the same actual particle, but for which eg. the momenta has been modified in the the generating process, and therefore is no longer present among the final state `Particle` objects. There is also a pointer for the inverse relationship. These pointers are `null` if no corresponding object exists.
- A pointer to an object carrying information about the colour connections (incoming/outgoing/neighbor colour/anti-colour) for this `Particle`. This pointer is `null` if the particle is colour singlet.
- A pointer to an object carrying information about the spin state of this particle. This pointer is `null` if there is no such information available.
- A Lorentz vector corresponding to the momentum of this `Particle`.
- The mass of this instance of the particle. (The nominal mass is stored in the corresponding `ParticleData` object.)
- A Lorentz vector corresponding to the space–time point where this particle was created.
- A Lorentz vector corresponding to the space–time distance this particle traveled before it decayed.
- The proper lifetime of this particle. (The nominal lifetime and/or width is stored in the corresponding `ParticleData` object.)
- The scale at which this particle is resolved (to be used by parton cascade models).
- A pointer to the `Step` object (see below) where this `Particle` first occurred.

Step

The **Particle** objects are collected in *steps*, where each **Step** corresponds to the state of a collision after a certain step in the event generating process. There are two lists, one for the particles which are in the final state and one for intermediate particles which were introduced in the last generation step. The **Step** object may also contain pointers to **SubCollision** objects, which are described below.

SubCollision

A **SubCollision** object contains information on a (normally hard) $2 \rightarrow N$ subprocesses in the collision. It contains pointers to the two incoming partons⁴, a list of pointers to the outgoing partons, and a pointer to an object describing the underlying diagram used for the generation.

Collision

Besides an ordered list of **Steps**, a **Collision** object contains the two colliding particles, and the space-time position of the collision vertex.

Event

An **Event** object contains pointers to **ParticleData** objects representing the particles in the colliding beams and a list of **Collision** objects. One of these **Collisions** is the *trigger* collision containing the process to be studied.

Selector

As mentioned above, the typical user of the event record need not be concerned with the internal structure of the **Event** class. Of course, access the underlying structure is possible if this is needed for a complicated analysis, but typically the user would call member functions of the **Event** and **Collision** classes to access the desired information. A typical task would be to extract a list of particles from the **Event** object. This is done with the **extract** method, where a **Selector** is specified representing the criteria on the particles to be extracted. A typical **Selector** class could be one which selects charged, final-state particles, or one which extracts charmed mesons which have decayed semi-leptonically.

⁴*Parton* in this context denotes not only quarks and gluons in a hadron, but may also be eg. a photon within an electron. In all cases it is represented by a **Particle** object

2.2 The structure of the event generating process

The actual event generation is performed by many different *handlers*, each responsible for a specific step in the generation process. The two main ones responsible for the more administrative tasks are the **EventHandler** and **CollisionHandler**, where the former is responsible for the administration of overlayed collisions, while the latter deal with the generation of a single collision.

Following the structure of the **Collision** class, the **CollisionHandler** contains a list of **StepHandler** objects responsible for the different steps in generation process. To be as flexible as possible, the order in which different steps should be performed in the generation is not predefined in PYTHIA7. Not only may the order be different in different physical models, it may also differ for different processes within the same model framework. However, to simplify things, the list of **StepHandlers** has some structure so that handlers may be grouped according to the typical time scales at which the corresponding physical processes are assumed to take place. Typically, first a hard sub-process is chosen, thereafter a parton cascade is allowed to develop, followed by the hadronization process and the decay of unstable particles.

However this order need not be followed strictly, and in particular each **StepHandler** is allowed to change the order in which subsequent handlers are applied, and also jump back in the list. In the example of Z^0 production above, the **StepHandler** responsible for the decay of the Z^0 must, in the case the decay is into $q\bar{q}$, be able to tell the **CollisionHandler** that a parton cascade should be applied, followed by hadronization and particle decay.

To help the **StepHandlers**, they may be given a **Hint** object. In the previous example, the handler responsible for the Z^0 decay would not only tell the **CollisionHandler** that a parton cascade needs to be performed, but could also give the hadronization handler a **Hint** containing eg. a list of pointers to the partons which need to be cascaded.

The structure of the handler classes is outlined in fig. 2 in Booch notation. Here follows a brief description of some of the classes.

EventHandler

The **EventHandler** contains a **LuminosityFunction** object which describes the parameters of the beams and some parameters of the detector, to be able to estimate the number of overlayed collisions per trigger. Then there is a **CollisionHandler** which can generate a trigger collision and a list of other collision handlers to generate overlayed collisions. The latter are typically of minimum-bias type and may be collisions the beam particles as for the trigger collision, but may also be eg. beam-gas collisions. The **EventHandler** class itself is not supposed to be inherited

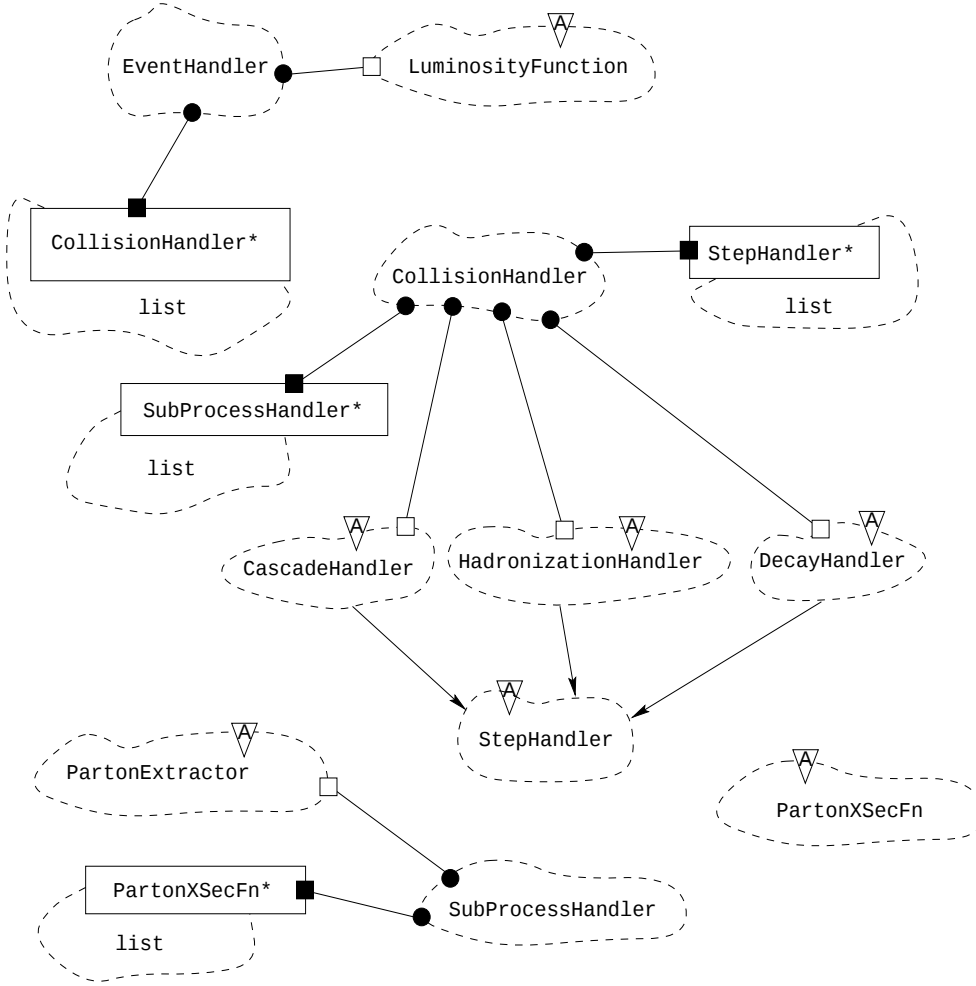


Figure 2: *Class diagram for the suggested structure of different handlers responsible for the generating process in PYTHIA7.*

from, instead all extra functionality should be implemented by inheriting from the **LuminosityFunction** class or configuring the **CollisionHandler** objects.

CollisionHandler

This is by far the most complicated class among the handlers. Given a pair of colliding particles, it will select a sub-process among a list of **SubProcessHandlers** to generate the primary sub-process. After that it will call a number of **StepHandlers** divided into groups as follows

- parton cascades,

- multiple interactions,
- hadronization and
- decays of unstable particles.

Each of these groups have one specialized step handler of the class `CascadeHandler`, `MultipleInteractionHandler`, `HadronizationHandler` and `DecayHandler` respectively, and two lists of general `StepHandlers`, one to be applied before and one after each main handler. There is also a list of `StepHandlers` to be applied directly after the `SubProcessHandler`.

Each of the `StepHandlers` in any of the lists may be given a `Hint` object, while the cascade, multiple interaction, hadronization and decay handlers may be given a list of `Hints`. The `CollisionHandler` has defaults for all these handlers, but the chosen `SubProcessHandler` may change these for the current event. The groups of handlers above will be traversed in order, and any handler called may add a `StepHandler` with a `Hint` to any of the lists, or just add a `Hint` to any of the lists of hints for the cascade, multiple interaction, hadronization and decay handlers. If a handler adds a handler and a hint in a list which the `CollisionHandler` has already gone through, the `CollisionHandler` will afterwards restart from that group. For example: if a decay handler gives a hint to the cascade handler to cascade partons from a Z^0 decay, the `CollisionHandler` will restart with the parton cascade group. However, each hint is only processed once by the collision handler, even if a list is processed several times.

Each of the groups can be individually switched on or off. If eg. the cascade and multiple interaction groups have been switched off, and the decay handler in the previous example has given a hint to the cascade handler, the generation will then restart with the hadronization group instead.

The `CollisionHandler` itself is not supposed to be extended with inheritance. Instead, different models for event generation should be implemented by inheriting from the `StepHandler` class and specifying how they should be called and by configuring the different `SubProcessHandler` objects.

SubProcessHandler

A `SubProcessHandler` has a `PartonExtractor` object and a list of `PartonXSecFn` objects. These interact so that the partonic cross section function is convoluted with a parton-parton luminosity given by the `PartonExtractor` to get an estimate of the maximum cross section for the given sub-process, which is necessary for the subsequent Monte Carlo Generation. After a sub-process is selected, the `PartonXSecFn` object is told to generate the kinematics of the parton-parton scattering, with two incoming and a number of outgoing partons. The `PartonExtractor`

object is then responsible for the generation of remnants of the incoming particles. The `SubProcessHandler` also contains an object describing the kinematical cuts to be applied to the parton-parton sub-process.

The `SubProcessHandler` itself is not supposed to be extended with inheritance. Instead, new sub-processes and parton density functions are implemented by creating new classes inheriting from `PartonExtractor` and `PartonXSecFn`.

PartonExtractor

`PartonExtractor` is an abstract base class, defining the methods needed to convolute a given partonic cross-section with the parton-parton luminosity and to generate the remnants when extracting partons from the colliding particles. In the example of Z^0 production at the LHC above, the class derived from `PartonExtractor` would typically contain a pointer to a `PartonDensity` object encapsulating the proton structure function parameterization, and a pointer to a `RemnantHandler` (which both may be changed by the user). As a more complicated case, we may consider collisions between quasi-real photons in e^+e^- colliders, where the photons may fluctuate into vector mesons. Here the parton extractor could contain a `PartonDensity` object describing the parton content of a photon, which would then be used in the double convolution of the partonic cross section with the parton densities of the photons and the spectrum of photons radiated from the electrons. The `RemnantHandler` would then be responsible for generating the electron and photon remnants given the extracted photon and parton.

PartonXSecFn

Also `PartonXSecFn` is an abstract base class, declaring methods for returning a `SigmaMaxFn` object encapsulating the estimated upper bound on the partonic cross section as a function of the squared parton-parton invariant mass, $\hat{s}$, and for constructing the kinematics of the parton-parton interaction. To enable the `PartonExtractor` to efficiently convolute the partonic cross section with the parton densities, the `SigmaMaxFn` is not only a simple function object, but has a predefined form:

$$\begin{aligned} \hat{\sigma}_{\max}(\hat{s}) = c_0 + \frac{c_1}{\hat{s}} + \frac{c_2}{\hat{s}^2} &+ \frac{c_3}{\hat{s}(\hat{s} + r)} + \frac{c_4}{(\hat{s} - m^2)^2 + m^2\Gamma^2} \\ &+ \frac{c_5}{\hat{s}(\hat{s} + r')} + \frac{c_6}{(\hat{s} - m'^2)^2 + m'^2\Gamma'^2}. \end{aligned} \quad (1)$$

This should be sufficient to describe most partonic cross sections. But neither the `PartonExtractor` or the `PartonXSecFn` are required to use this internal structure. The `PartonExtractor` may use it as a normal function object, and the

`PartonXSecFn` may use a derived class, setting all constants in eq. (1) to zero and override the method returning the function value. It is also possible for the `PartonExtractor` and `PartonXSecFn` classes to subdivide the $\hat{s}$ interval, to allow for more efficient generation.

StepHandler

The nature of a `StepHandler` may be quite varied. Besides the four standard step handlers, the `CascadeHandler`, `MultipleInteractionHandler`, `HadronizationHandler` and `DecayHandler`, there may be handlers which performs eg. colour reconnections or Bose–Einstein reweighting of the event. Any `StepHandler` may throw a `Veto` exception, telling the `CollisionHandler` to discard the current collision and generate a new one. This means that various cuts may be implemented as `StepHandlers`. A `StepHandler` may also throw a `Stop` exception so that the generation can be stopped and later restarted by the controlling program. Also event analysis may be implemented as a step handler.

When asked to handle a step, the `StepHandler` is passed a pointer to the current `Step` in the generation together with a `Hint` object and a pointer to the `CollisionHandler` from which the request originated.

Hint

In its simplest form, a `Hint` is a list of pointers to `Particles` to be treated by a `StepHandler`. A handler should then not treat any other particles in the current `Step`. The `Hint` may also give a minimum and maximum scale telling eg. a cascade handler to shower partons starting from one resolution scale, evolving down to the other.

There are some special `Hints`. One is the null hint telling the handler to figure out for itself what to do given a `Step` object. Another is the stop `Hint`, which tells the `CollisionHandler` to stop the generation in a way such that it can be restarted again by the controlling program.

It is possible to use inheritance to introduce additional information in the hints, but a `StepHandler` is not required to take any notice of this extra information.

2.3 Initialization

When an event handler is initialized, the `LuminosityFunction` is initialized and asked to specify the interval in squared particle-particle rest mass, s and the type of colliding particles for the trigger collision. If the interval in s is very large, or

if there are other reasons for several intervals in s , the `LuminosityFunction` may specify a list of intervals. The trigger `CollisionHandler` is then initialized given the colliding particles and the list of s -intervals.

The `CollisionHandler` hands this information to initialize each of its `SubProcessHandler` objects. Each `SubProcessHandler` then passes this information on to its `PartonExtractor` object which may subdivide the s intervals further, and for each interval it is asked to specify a list of intervals in squared parton-parton rest mass, $\hat{s}$, which it may produce and a list of possible parton-parton combinations⁵ for each $\hat{s}$ interval. This information is then handed the `PartonXSecFn` objects in the `SubProcessHandler`, each of which may subdivide the $\hat{s}$ intervals further. Then to each $\hat{s}$ interval and each parton-parton combination the `PartonXSecFn` objects should associate a `SigmaMaxFn` which should parametrize the maximum parton-parton cross section the corresponding sub-process may give as a function of $\hat{s}$, integrating over all other internal degrees of freedom. These functions are then passed back to the `PartonExtractor`, which must convolute them with the parton-parton luminosity function it represents, to give a maximum integrated cross section for each sub-process in each s -interval. Hence, for each s interval and each $\hat{s}$ interval and each parton-parton combination and each `PartonXSecFn` object, there is now an upper limit of the cross section stored to be used in the subsequent generation. The `SubProcessHandler` sums up all these cross sections and hands it back to the `CollisionHandler`.

Note that for well-behaved parton-parton cross section and luminosity functions there will typically be no need for dividing into many $\hat{s}$ intervals. Nor will there in general be any reason to divide up in several s interval.

The `CollisionHandler` representing the overlayed collisions in an `EventHandler` object is then initialized in the same way.

Besides the procedure above, the `EventHandler` and its `CollisionHandlers` also initializes all `StepHandlers` and `ParticleData` objects to be used to check for internal consistency.

2.4 Running

When run, the `EventHandler` asks its `LuminosityFunction` object to generate an s which is handed to the trigger `CollisionHandler`. The `CollisionHandler` selects a `SubProcessHandler` according to their summed maximum integrated cross sections for the relevant s interval. This `SubProcessHandler` then selects an $\hat{s}$ interval, a parton-parton combination and a `PartonXSecFn` according to the different maximum cross sections, and asks the `PartonExtractor` to generate an $\hat{s}$

⁵Also different flavour combinations are treated separately.

according to this selection. The **PartonXSecFn** is then asked to calculate the exact cross section for the selected $\hat{s}$ and parton-parton combination and return the ratio of this cross section to the previous estimated upper limit. In doing so it may be necessary for the **PartonXSecFn** to also generate internal degrees of freedom, which will be used later in the generation. The corresponding sub-process is kept with a probability given by the returned ratio times a corresponding ratio from possible overestimations of the parton-parton luminosity function in the **PartonExtractor** object.

If the selection is discarded the **CollisionHandler** restarts from selecting a **SubProcessHandler**. If the selection is kept, the **PartonXSecFn** object is asked to generate the exact kinematics of the parton-parton sub-process in the parton-parton rest frame (a **SubCollision** object). Given this, the **PartonExtractor** is then asked to generate the rest of the kinematics in the particle-particle rest frame, ie. generate the rapidity of the parton-parton subsystem, boosting it accordingly to the rest frame of the colliding particles and generate the remnants of incoming particles, taking care of colour connections in the case the partons are coloured. Thus we have the initial **Step** object in the **Collision**.

The **CollisionHandler** now starts to go through the lists of step handlers calling each of them in turn, starting with the post-sub-process handlers, the pre-cascade handlers, the cascade handler (going through all its hints), the post-cascade handlers etc. Each of the handlers may throw a **Veto** exception, in which case the **CollisionHandler** discards the current **Collision** and restarts from selecting a **SubProcessHandler**. Each **StepHandler** may also instruct the **CollisionHandler** to jump back in the list of step handlers to eg. redo the hadronization steps. This continues until all **StepHandlers** have been called, after which the **CollisionHandler** hands back the generated **Collision** to the **EventHandler**.

Note that the **PartonExtractor** of the selected subprocess may be asked by a **StepHandler** to regenerate the particle remnants several times during the generation of one collision, eg. in the case when the step handler is performing backward parton shower evolution, or multiple interactions.

The **EventHandler** boosts the **Collision** to the specified lab frame and then repeats the procedure with all the handlers corresponding to overlaid collisions collecting all the obtained **Collisions** into an **Event**, which is handed back to the controlling routine.

In the case of very simple tasks, where the user is not interested in generating the whole event, it should also be possible to hand the **EventHandler** an **Event**, which is filled *by hand* with eg. a single Z^0 , and ask it to perform the decay and any subsequent steps needed.

2.5 Analysis

The generated events need to be analyzed in some way. PYTHIA7 will contain a basic structure for implementing analysis and will also provide some standard analysis tasks (see also section 7.4). As mentioned above, the analysis may be implemented as a `StepHandler` and can thus be performed in the middle of the generation, but may also be applied by the user interface after the full event has been generated.

2.6 Finishing

After a run, a lot of information will have been gathered by the different handlers. An important example is the Monte-Carlo integrated cross sections for the different processes that has been generated. But also other statistics of the run and possible error messages, need to be communicated to the user. When running in batch mode, the `EventHandler` may be told to write out selected information to a log file, otherwise, the information should be made available through the user interface.

In addition, the `EventHandler` may ask each of the handlers which have been used in a run to write a brief summary of what it has done and which physical model was used. This should be done in L^AT_EX format and should include references to articles describing the models. In this way, the log file can be used as a template for describing the event generation if the result is published, hopefully ensuring that the simulation is correctly described and that credit is given to the right people.

3 Introducing new models in PYTHIA7

Even if PYTHIA7 will contain a lot of physics models capable of simulating a wide range of events for many different experimental situations, there will always be users who will want to implement their own physics models for parts of the event generation. Here are some examples:

3.1 n -fermion generators

At eg. LEP 2, there is a large need for interfacing dedicated four-fermion generators to standard parton cascade and hadronization routines. In ref. [8] a general form of such a routine was proposed. Within the PYTHIA7 framework, this would be accomplished by writing a class which inherits from `PartonXSecFn`, overriding the virtual methods responsible for communicating the `SigmaMaxFn` to the `Parton-Extractor`, and construction of the n -fermion kinematics and colour connections

in a `Step` object.

3.2 Parton density functions

Today, there exist a standard subroutine package, `PDFLIB` [9], which includes most available parton density parameterizations in the literature, and most event generators are interfaced to it. For `PYTHIA7` any parameterization can be implemented by writing a class inheriting from the `PartonDensity` class, typically only overriding the function returning the parton density for a given parton at a given x and Q^2 .

3.3 Other models

Besides the `PartonXSecFn` and `PartonDensity` classes, it is possible to introduce new models by writing classes inheriting from the general `StepHandler` class and the more specialized `CascadeHandler`, `MultipleInteractionHandler` and `HadronizationHandler` classes. Also the `PartonExtractor`, `RemnantHandler`, `LuminosityFunction`, `Decayer` and `DecayRater` classes can be inherited from to introduce new models. Finally one can also imagine inheriting from the `Particle` and `ParticleData` classes to introduce functionality needed by new models.

In all cases `PYTHIA7` will provide well documented example classes which can be used as templates to simplify the implementation.

4 User Interface

There are many ways in which the user needs to communicate with the different objects used in the `PYTHIA7` framework. This could of course be done by writing a controlling program in C++ which directly interacts with the `PYTHIA7` class library, but the most convenient way would be to use a high-level (graphical) user interface. `PYTHIA7` will be distributed together with a rudimentary such interface, but it is important that the design also allows for the development of more advanced user interface applications. In particular it is important that a user implementing a new physical model as eg. a `StepHandler`, does not need to worry about which user interface is used, but that there is an easy and standardized way of communicating parameters and options in the model implementation to any user interface. For this reason, `PYTHIA7` will supply a set of low-level interface classes which defines the different ways of communication between objects and a user interface (see also section 7.7.)

4.1 Parameters and Switches

All classes in PYTHIA7 which needs to communicate with the user interface will inherit from the `Interface` class. These includes all the handler classes, the `LuminosityFunction`, `PartonXSecFn`, `PartonDensity`, etc.

There are four main ways of communicating with `Interface` objects. There is the setting and retrieving of real-valued *parameters* and of *switches* with a predefined set of integer-valued options. These are both central to the way most physics processes are modeled in an event generator. There is also the *association* of one or several `Interface` object with another, which is needed when eg. specifying a `PartonDensity` object to be used in a `PartonExtractor`. Finally there is a more general way of communication by *commands* in the form of a character string with an implementation-defined interpretation.

The parameters and switches may be grouped in a hierarchical way in each class to enable a more logical structure. It is also possible to define default values and ranges of allowed values. These may be specified as simple numbers or as functions. The latter can be used when the limits of one parameter is a function of other parameters, eg. for `CascadeHandlers`, where the parameter representing the cutoff scale typically must be larger than the Λ_{QCD} parameter.

All parameters are local to a given object and are accessed by specifying the name of the object and the group and name of a parameter, eg.

"Object:/Group/Subgroup/Parameter".

It is also possible to access parameters of one object indirectly if it is associated to another, eg.

"Object:Assoc:Parameter",

which accesses the *Parameter* of the object currently pointed to by the *Assoc* association of *Object*.

To make sure the same parameters for eg. hadronization is used everywhere in the generation one must use the same `HadronizationHandler` object everywhere. Otherwise, if one need different parameter settings for eg. overlayed collisions than for trigger collisions, the `HadronizationHandler` object may be duplicated, so that different collision handlers may use different objects with different parameter settings although they implement the same physical model.

It is also possible to define truly global parameters as `Interface` objects. These could then be assigned to other `Interface` object by *association*. An example of such an object could be α_{EM} , which typically would have a method for retrieving the value as a function of a given scale.

There may be interdependencies between different objects used in a simulation. For example, changing the width of the Z^0 will change the cross section used in the

PartonXSecFn object describing the $q\bar{q} \rightarrow Z^0$ sub-process. If this is done in mid-run, the **EventHandler** object needs to be re-initialized. To avoid unnecessary re-initialization, there will be a system of *time-stamps* and *dependency* lists. When the state of an object is changed in a way that it may influence other objects, its time-stamp should be updated. This is then noted by the corresponding **EventHandler** object, which reinitializes only those objects which depends on the changed object, in a way similar to that of the Unix *make* utility.

4.2 A user session

As an example of what communication will be necessary, we here outline what a typical event generator session could look like.

- Start the session by reading a standard setup-file (included in the PYTHIA7 distribution) from disk.
- Copy the the standard **EventHandler** object for LHC events. This would contain a default setup using the default parton densities, parton showers, hadronization etc. included in PYTHIA7.
- In the **SubProcessHandler** of the trigger **CollisionHandler** object, insert a $q\bar{q} \rightarrow Z^0 g$ and a $qg \rightarrow qZ^0$ **PartonXSecFn** object. Then replace the **PartonDensity** object in the **PartonExtractor** with one implementing your favorite parton density parameterization. Finish off by modifying the kinematical cuts.
- In the **ParticleData** object representing the Z^0 , switch off all non-leptonic decay modes.
- Specify the analysis objects to be applied to each **Event**, the number of events to generate, and the files to which statistics and analysis results should be written.
- Save this setup to a file, and start running.

All this would typically be done by clicking and dragging within a graphical user interface. The rudimentary user interface provided by PYTHIA7, would at least be capable of reading a file with command lines, which could look something like the example in fig. 3.

The user could also write a small main program and access the different object directly in C++. This could be a bit cumbersome, however, and typically the user would use a mixture of this and functions accessing the command-line interface as in the example program in fig. 4.

```

read Pythia7Default.conf
set OutputFile MyLHCRun.out
copy LHCSample MyLHCRun
add MyLHCRun:Trigger:SubProcess:PartonXSec q+qbar->Z0+g
add MyLHCRun:Trigger:SubProcess:PartonXSec q+g->q+Z0
set MyLHCRun:Trigger:SubProcess:Extractor:PartonDensity MyDensities
set MyLHCRun:Trigger:Cuts:ptmin 3.0 GeV
tell Z0 SwitchOff decay all
tell Z0 SwitchOn decay Z0:?AnyLepton,?AnyAntiLepton;
add Analysis MyZ0Ptspectrum
set NumberOfEvents 10000
save MyLHCRun.conf
run MyLHCRun

```

Figure 3: *An example of what an input file to a command-line interface could look like for PYTHIA7. Note that the syntax will most likely change during the development of PYTHIA7.*

5 Error handling

There are many situations where different kinds of errors may occur during the event generation. Some of them are due to inconsistencies which may be detected at initialization time, but others do not occur until the actual running starts. The error handling in PYTHIA7 is the responsibility of the `EventHandler`. At initialization time, the errors are passed directly on to the user interface, for the user to deal with. When running in batch, all (non-fatal) errors are collected and summarized to a log file after the run. The errors which can occur may be more or less severe. PYTHIA7 will support a number of levels of severity, ranging from warnings, which do not really affect the generation, via less serious errors where an event has to be thrown away, to serious errors where the current run is aborted and very serious errors where the whole application aborts and dumps core.

The errors are communicated to the `EventHandler` with simple member-function calls, except for the cases when an event is discarded or a run is aborted, in which case the C++ exception mechanism is used.

6 Documentation

A reference manual and a user guide should be written and made available both on paper and on the web. In addition all header files should be documented in a way so that they can be automatically formatted into easily readable pages describing each class and all public and protected members of each class. As an example, the header files in CLHEP are written in such a way, and CLHEP includes a very simple tool called `classdoc` to format the header files into Unix-style *man-pages*. The HepPDT distribution also includes a development of `classdoc` called `h2html` formatting header files into web pages.

```

#include "Pythia7/main.h"    // The main Pythia include file
                             // defining all standard things
#include "MyDensities.h"    // Header file defining the
                             // MyDensities class inheriting
                             // from PartonDensity
#include "MyZ0Ptspectrum.h" // Header file defining an analysis
                             // class
#include <fstream>           // Standard file I/O

int main() {

    // Create a BaseInterface object to handle the run.
    Pythia::BaseInterface pythia;

    // Read default setup and set output file.
    std::ofstream outfile("MyLHCRun.out");
    pythia.outputFile(outfile);
    pythia.read("Pythia7Default.conf");

    // Copy a standard event handler to be modified.
    pythia.copy("LHCSample", "MyLHCRun");

    // "q+qbar->Z0+g" and "q+g->g+Z0" are standard PartonXSec objects.
    pythia.command("add MyLHCRun:Trigger:SubProcess:PartonXSec q+qbar->Z0+g")
    pythia.command("add MyLHCRun:Trigger:SubProcess:PartonXSec q+g->q+Z0")

    // Create a MyDensity object, name it and add it to the general set
    // of interface objects. Finally tell the parton extractor to use it.
    // GCPtr is a 'smart' reference counting pointer.
    GCPtr<MyDensities> pdf = new MyDensities;
    pdf->name("MyDensities");
    pythia.addInterfaceObject(pdf);
    pythia.command("set MyLHCRun:Trigger:SubProcess:Extractor:PartonDensity"
        " MyDensities");

    // Finish the setup and save it.
    pythia.command("set MyLHCRun:Trigger:Cuts:ptmin 3.0 GeV");
    pythia.command("tell Z0 SwitchOff decay all");
    pythia.command("tell Z0 SwitchOn decay "
        "Z0:?AnyLepton,?AnyAntiLepton;");
    pythia.save("MyLHCRun.conf");

    // Create an analysis object.
    MyZ0Ptspectrum analysis;

    // Generate events and analyze them.
    GCPtr<EventHandler> eventHandler = pythia.getEventHandler("MyLHCRun");
    for ( int i = 0; i < 10000; ++i ) {
        GCPtr<Event> event = eventHandler->getEvent();
        analysis.analyze(event);
    }

    // Write out statistics and results.
    pythia.writeStatistics();
    analysis.writeHistograms(outfile);

    return 0;
}

```

Figure 4: *An example of what a main program using the PYTHIA7 library could look like. Note that the syntax and naming of methods will most likely change during the development of PYTHIA7.*

PYTHIA7 should also include a tool for propagating the documentation of parameter and switches in physical models implemented within the framework, both to the reference manual and to the user interface. This should be done in a way such that a model implementor only needs to write the documentation of each parameter and option once. This information would then be extracted and converted both to HTML and L^AT_EX code to be inserted in the documentation, and to a format readable to the user interface.

7 Relationship to CLHEP/LHC++

PYTHIA7 will be built as a class library, and it is clear that many of its components are general enough to be used also outside of the program. The general strategy for PYTHIA7 is that it should depend on no other software library other than the standard C++ libraries. This means that a user should be able to obtain the PYTHIA7 distribution and install it with the only requirement that he or she has a standard-conforming C++ compiler with accompanying standard library. This does not mean, however, that some components of PYTHIA7 cannot be shared by other parts of the LHC++ project [10] especially CLHEP [11]. The following is a discussion of such components.

7.1 The Event record

Clearly, the event record is something that must be shared with applications outside of PYTHIA7, since this is the main way of communicating information about a generated event. The structure suggested above is however fairly complicated, and although this should not be a problem for analyzing an event, one could imagine situations, eg. when a program other than PYTHIA7 is used for the event generation, where it would be desirable to have a less complicated event record. The way to solve this potential problem would be to define a set of standard operations one would need for any kind of event record, such as *extract a list of all stable charged particles*, and either define them in an abstract base class from which the PYTHIA7 `Event` and other implementations would inherit, or in a *traits* class [12] for event records.

One of the most central among the event record classes is the `Particle` class. Experience have shown that it is virtually impossible to agree upon a common particle class for the HEP community. Not only does the word particle mean different things to different people (eg. generated particle, reconstructed particle, particle track, etc.), even if there is conceptual agreement of what a particle is, there are different uses for it, and since it typically would be a very central class in

any application, different people want to optimize the implementation in different ways. PYTHIA7 will, of course, contain a `Particle` class optimized for event generation, and it is clear that this cannot be the only particle class the HEP community. To facilitate the communication between different HEP applications, it therefore seems reasonable to define a particle traits class, giving a standard set of operations on a given particle class and maybe also specifying conversions between different particle classes.

Another important class is Lorentz and three-vectors. Such classes are already included in CLHEP, and PYTHIA7 will, of course, use these. In addition, PYTHIA7 may also include a five-vector class inheriting from the CLHEP Lorentz vector class with an additional mass data member to allow for optimization of frequently used methods.

7.2 Particle properties

Whereas an omni-purpose particle class may be impossible to define, it should not be that difficult to define a base class describing standard particle properties. In ref. [7] there is a suggestion of a set of classes for this purpose. It basically implements the standard information from the Particle Data Group about particle properties. The particle property classes in PYTHIA7 will most likely be based on these, but will add more information needed to do event generation as described in section 2.1.

7.3 Event generator utilities

Other generator specific classes which should be made general enough to be used outside of PYTHIA7 are simple classes such as the templated `Selector` class for efficient selection of objects of a given class according to given probabilities, and more complicated classes eg. for phase space generation.

7.4 Analysis

PYTHIA7 will include a number of tools for performing analysis of generated events. These will include thrust and sphericity analysis, jet reconstruction, analysis of energy-energy correlations, multiplicity distributions etc. These should also be made general enough to be used outside of PYTHIA7.

7.5 General utilities

PYTHIA7 will contain a number of general utility classes, which are not necessarily specific to event generation, or indeed to HEP in general. Because of the requirement that PYTHIA7 should not depend on other software libraries, most of these must be included in the code. Here are some examples:

To reduce the risk of memory leaks, PYTHIA7 will include a simple scheme for garbage collection of dynamically allocated objects. This scheme will consist of a base class for reference counting, together with a templated *smart pointer* class.

It is conceivable that someone implementing PYTHIA7 in an application would like to use it together with an object database, where eg. the produced events would be stored. In this case objects would be allocated in the database and accessed with *handles* instead of pointers. It is therefore desirable that the smart pointers in PYTHIA7 are parameterized in a way such that they could easily be modified to encapsulate database handles instead of the simple reference counted pointers. This could be achieved by adopting a strategy like the HepODBMS [13] one, where the use of a database can be enabled or disabled with a compilation switch.

PYTHIA7 will use the CLHEP strategy for physical units and constants.

Simple base classes for objects with a name, will be included as well as classes such as intervals of real numbers etc.

7.6 Persistency

Since PYTHIA7 should not depend on other software libraries, it will not be tied to an object database. But it will nevertheless be necessary to store and retrieve objects persistently on disk. Otherwise it would be much too cumbersome to set up a `EventHandler` each run. PYTHIA7 will therefore include a simple scheme for persistency, probably similar to that which previously was included in CLHEP. Again, it is desirable that this scheme does not prevent anyone from interfacing PYTHIA7 to a real object database.

7.7 User interface

PYTHIA7 will not include a fancy user interface, but it is important that the code is prepared in a way such that implementing a user interface is easy and streamlined, as explained in section 4. Currently, a low-level set of user-interface classes is being developed for the Geant 4 project [2], and it is likely that PYTHIA7 will use this strategy or something compatible.

8 Outlook

Presently there exist only some fragments of the components of the basic structure of PYTHIA7. The plan is to now start the actual code writing, resulting in a proof-of-concept release of PYTHIA7 in the summer of 1999, containing the full structure but with only a minimum of physics models implemented. A complete PYTHIA7 version, with all the physics capabilities of the current version of PYTHIA should be released in the end of 2000.

Acknowledgments

This paper is the result of many long and interesting discussions with Torbjörn Sjöstrand and would not exist without his help.

This work was supported in part by the EU Fourth Framework Programme ‘Training and Mobility of Researchers’, Network ‘Quantum Chromodynamics and the Deep Structure of Elementary Particles’, contract FMRX-CT98-0194 (DG 12 - MIHT).

Appendices

A Coding conventions

There are no strict coding conventions for PYTHIA7. Especially since there will initially only be a limited number of authors, there is no need to enforce any particular coding style. Below are some conventions which may be of interest for future users and developers.

A.1 Name spaces and filenames

All code in the PYTHIA7 distribution should be put in the *namespace* “Pythia”.

Header files should only contain declarations and documentation, preferably with only one class per header file. If the class is called `ClassName`, the header file should be called `ClassName.h`. Inline function definitions should be placed in a file named `ClassName.icc`, which should be `#included` in the header file. Non-inline, non-templated functions should be placed in an implementation file named `ClassName.cc`, Non-inline templated function definitions should be placed in a file name `ClassName.tcc`, which could either be `#included` in the header file or in

the implementation file depending on what the compiler can handle. Exception class declarations special to a class declared in `ClassName.h` may be declared in a file named `ClassName.xh` to be `#included` in the header file which then can be kept cleaner. To avoid unnecessary header file inclusions, a forward declaration of a class defined in a header file may be extracted into a file named `ClassName.fh` (cf. the `<iosfwd>` header file in the standard C++ library).

A.2 Garbage collection

All classes should be reference counted if the corresponding objects are expected to be dynamically allocated. A base class for reference counting will be provided together with a templated *smart pointer* class to enable rudimentary garbage collection.

B Licensing

The PYTHIA7 code will be available free of charge to use for any academic research purpose. The licensing terms will be similar to those of the non-commercial parts of the LHC++.

C Booch notation

In figure 5 there is a quick guide to the Booch notation used in the figures in this paper.

References

- [1] Further information on the PYTHIA7 project will be available at <http://www.thep.lu.se/~leif/Pythia7/>
- [2] The Geant 4 R&D Project. See <http://wwwinfo.cern.ch/asd/geant/geant4.html>
- [3] T. Sjöstrand, Comput. Phys. Commun. **82** (1994) 74.
- [4] T. Sjöstrand, et al., in “Z physics at LEP 1”, eds. G. Altarelli, R. Kleiss and C. Verzegnassi, CERN 89-08 (Geneva, 1989), Vol 3, p. 143.
- [5] Grady Booch, “Object-Oriented Analysis and Design with Applications”, 2nd ed., Benjamin/Cummings Publishing Company (1994).

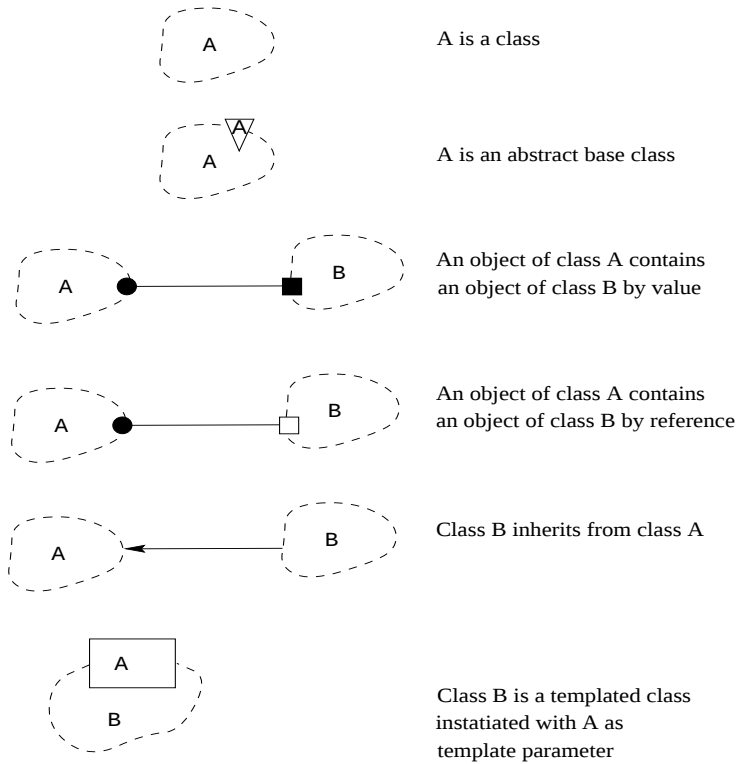


Figure 5: *Quick guide to the Booch notation used in this paper*

- [6] Particle Data Group, C. Caso et al., Eur. Phys. J. **C3** (1998) 1.
- [7] HepPDT, a set of classes encoding particle properties. See <http://www.thep.lu.se/~leif/CLHEP-PDT/>
- [8] I.G. Knowles, et al., in “Physics at LEP 2”, eds. G. Altarelli, T. Sjöstrand and F. Zwirner, CERN 96-01 (Geneva 1996), vol 2, p. 103.
- [9] H. Plochow-Besch, Comput. Phys. Commun. **75** (1993) 396.
- [10] Libraries for HEP Computing – LHC++, see eg. <http://wwwcn.cern.ch/pl/lhc++/index.html>
- [11] Class Library for High Energy Physics, see eg. L. Lönnblad, *Comp. Phys. Comm.* **84** (1994) 307 and <http://wwwcn1.cern.ch/asd/lhc++/clhep/index.html>
- [12] For an introduction to the traits paradigm in C++, see eg. N. Meyers in *C++ Report*, June 1995 (also at <http://www.cantrip.org/traits.html>).
- [13] HepODBMS is a part of LHC++ (<http://wwwcn.cern.ch/pl/lhc++/index.html>) defining a general interface to the ODBMS database standard.